



LED Bollard Round High Lumen 8 Series



BRPDT



BRPFT



BRLDT



BRLFT

Description

The LITELUME™ Bollard Collection (LL-B) features an anti-corrosion, shock resistant heavy duty die-cast aluminum housing for long-lasting durability. Easy installation and maintenance due to our self-oriented top cover design. A wide range of sizes and lumen packages allow for variety of applications. Introducing the Round High Lumen 8 Series.

Applications: Security, Pathway, Perimeter, Pedestrian and Walkway lighting.

Fixture Information

Size:	35W/60W
Housing:	Die-cast Aluminum Housing
Finish:	Protective powdercoat
Color:	Standard: Bronze, Black Custom Options: White (WH) and Gray (GY)
Power Factor:	.95
Voltage:	Standard: 120-277V
Sensor:	Standard: No sensor
Warranty:	10-Year Limited Warranty

Performance Data

Lumen Output:

2200 to 6000 lm

Lumens Per Watt (typical):

62 to 100 lm/W

CCT:

3000K
4000K
5000K

Distribution:

T5 120D

Lifespan:

100,000 hours

Ratings & Certificates

ETL Listed for Wet Location
IP65 Listed




Intertek




Dimensions

Item	Diameter	Length
Round Top Louver (BRLDT)	8.375"	42.00"
Round Top Parabolic (BRPDT)	8.375"	40.56"
Flat Top Louver (BRLFT)	8.375"	42.00"
Flat Top Parabolic (BRPFT)	8.375"	40.56"

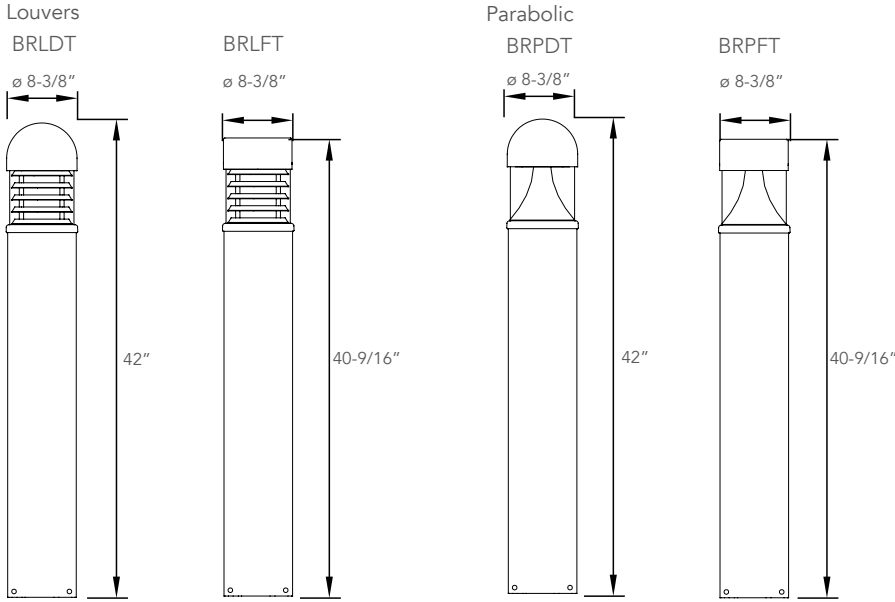

Photometric Data

Louvers

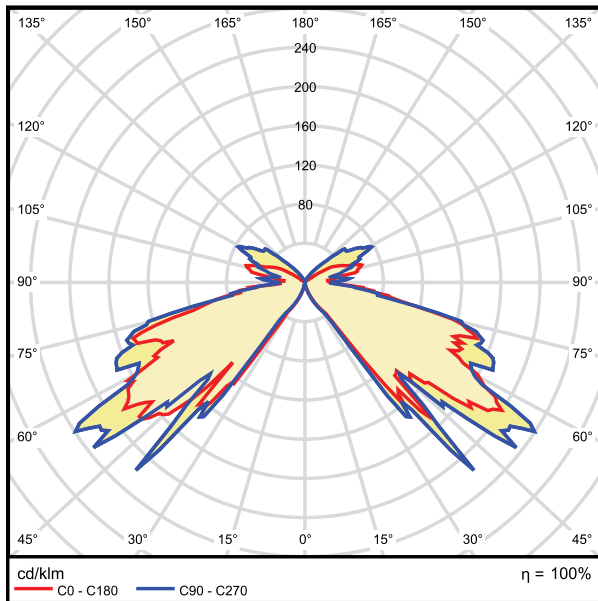

Prismatic

