




2FT/4FT Linear High Bay

**Basic Data**

| Product Number | Wattage | Color Temp. | Voltage          | Lumens | Warranty | CRI |
|----------------|---------|-------------|------------------|--------|----------|-----|
| EX-20W H2YZDA  | 20      | 4000K-5700K | 100-277/200-480V | 2800   | 5 years  | 70  |
| EX-30W H2YZDA  | 30      | 4000K-5700K | 100-277/200-480V | 4200   | 5 years  | 70  |
| EX-40W H4YZDA  | 40      | 4000K-5700K | 100-277/200-480V | 5600   | 5 years  | 70  |
| EX-50W H4YZDA  | 50      | 4000K-5700K | 100-277/200-480V | 7000   | 5 years  | 70  |
| EX-60W H4YZDA  | 60      | 4000K-5700K | 100-277/200-480V | 8400   | 5 years  | 70  |

“H2, H4”=Product code, “Y”=D or N:Dimmable or non-dimmable “Z”= CCT, from 4000~5700K “D”=Beam angle, D40 for 40°,D60 for 60°,D90 for 90°, D120 for 120° A for glass info. blank for flat glass, C for spherical glass.

**Dimensions**

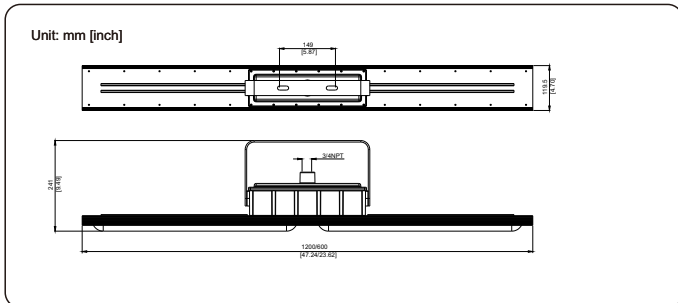

50W/120D

|      | Center Beam fc | Beam Width |       |
|------|----------------|------------|-------|
| 10ft | 25fc           | 30ft       | 34ft  |
| 20ft | 6fc            | 59ft       | 67ft  |
| 30ft | 3fc            | 89ft       | 100ft |
| 40ft | 1fc            | 148ft      | 134ft |
| 50ft | 0.6fc          | 178ft      | 168ft |

■ Vert, Spread; 120°  
■ Horiz, Spread; 120°

Lighting Distribution

**Approvals**

|  |   |
|--|---|
| Marking Atex                                     | II2 G Ex db IIB T6 Gb<br>II2 D Ex db IIIC T80 Db IP66   |
| Marking IECEx                                    | Ex db IIB T6 Gb<br>Ex db IIIC T80 Db IP66   |
| Marking UL844<br><small>(North American)</small> | Class I, Division 2, Groups A, B, C, D<br>Class II, Division 1, Groups E, F, G<br>Class II, Division 2, Groups E, F, G<br>Class III |
| Marine Marking                                   | UL 1598A<br>ABS and DNV Type Approved   |
| Other Rating                                     | IP 66<br>IK 10  |

Installation

